


- 1 Circular Styrofoam
- 2 Instructions compartment
- 3 Platter mat
- 4 Levitating platter
- 5 RCA cable compartment
- 6 Counterweight compartment
- 7 Hex keys and anti-skating weight compartment
- 8 Top half of the Styrofoam box
- 9 Turntable body
- 10 Tonearm transport lock
- 11 Cartridge protector
- 12 Power cord compartment
- 13 Power adapter compartment
- 14 Bottom half of the Styrofoam box
- 15 Cardboard box

16. SPECIFICATIONS

16.1. Dimensions

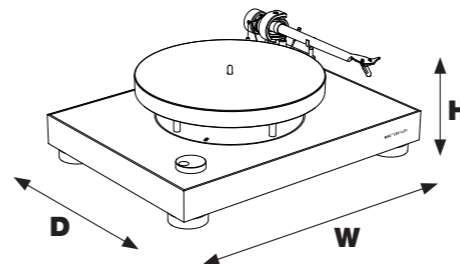

Depth (D)	355 mm
Width (w)	477 mm
Height (H)	185 mm

16.2. Turntable specifications

Type	Magnetic Levitation, Semi – automatic operation
Motor	No motor
Drive method	MAG-LEV Audio Drive (magnetic coil drive)
Speeds	33-1/3 RPM, 45 RPM
Turntable platter	ABS plastic & Carbon Fiber + magnets and metals, 2.2kg or 4.9 lbs
Wow and flutter	< 0,17%
Signal-to-noise ratio	-73dB
Operating temperature	35°C
Weight	9,8 kg
Package weight	12,2 kg

16.3. Tonearm specifications

1" = 2,54 cm	
Tonearm model	Pro-Ject 9cc
Headshell 0,5" standard	✓
Mounting distance arm base	212 mm
Armtube made of	carbon-fibre
Headshell made of	carbon-fibre

Eff. tonearm length	9"
Eff. tonearm mass	8,5 g
Overhang	18 mm
Supplied counterweights for cartridge weights counterweight no. ()	6 - 10 g (nr. 16) -----
Optional counterweights for cartridge weights counterweight no. ()	3 - 6 g (no. 7) 5 - 8 g (no. 9) 11 - 15 g (no. 3)
Downforce range	10 - 30 mN
Weight (without counterweight)	250 g

16.4. Cartridge specifications

Cartridge model	Ortofon OM10
Cartridge type	MM
Recommended load impedance	47kOhm
Output voltage	4,0mV
Stylus	elliptical
Cantilever	aluminium
Tracking force range	12,5 – 17,5 mN (1,25gr – 1,75 gr)
Cartridge weight	5 g